


## FEATURES

- Wide Operating Voltage Range of 2.0V to 6.0V
- Outputs Can Drive up to 10 LSTTL Loads
- Low Power Consumption, 20 $\mu$ A Maximum I<sub>CC</sub>
- Typical t<sub>PD</sub>: 11ns
- $\pm 4$ mA Output Drive at 5.0V
- Low Input Current of 1 $\mu$ A Maximum

## APPLICATIONS

- Microwave Oven
- Mice
- Printers
- AC Inverter Drives
- UPS
- AC Servo Drives
- Other Motor Drives

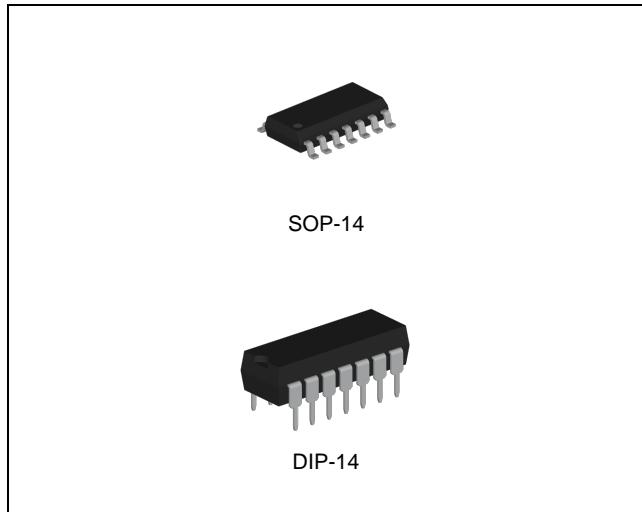

## ORDERING INFORMATION

Device	Package
74HC14D	SOP-14
74HC14N	DIP-14

## DESCRIPTION

The 74HC14 types consist of six inverter circuits with Schmitt-trigger inputs. They perform the Boolean function  $Y = \bar{A}$  in positive logic. Each of the six inverters is a single stage.

## ABSOLUTE MAXIMUM RATINGS (Note 1)

CHARACTERISTIC		SYMBOL	MIN.	MAX.	UNIT
DC Supply Voltage		V <sub>CC</sub>	-0.5	7	V
Input Clamp Current <small>(Note 2)</small>	V <sub>I</sub> < 0 or V <sub>I</sub> > V <sub>CC</sub>	I <sub>IK</sub>	-	$\pm 20$	mA
Output Clamp Current <small>(Note 2)</small>	V <sub>O</sub> < 0	I <sub>OK</sub>	-	$\pm 20$	mA
Continuous Output Current	V <sub>O</sub> = 0 to V <sub>CC</sub>	I <sub>IN</sub>	-	$\pm 25$	mA
Continuous Current through V <sub>CC</sub> or GND			-	$\pm 50$	mA
Maximum Junction Temperature		T <sub>J</sub>	-	150	°C
Storage Temperature		T <sub>STG</sub>	-65	150	°C

Note 1. Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Note 2. The input and output negative-voltage ratings may be exceeded if the input and output clamp current ratings are observed.

# Hex Schmitt Trigger Inverters

74HC14

## RECOMMENDED OPERATING CONDITIONS (Note 3)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	$V_{CC}$	2	6	V
DC Input Voltage	$V_{IN}$	0	$V_{CC}$	V
DC Output Voltage	$V_{OUT}$	0	$V_{CC}$	V
Operating Free-Air Temperature Range	$T_A$	-40	85	°C

Note 3. The device is not guaranteed to function outside its operating ratings.

## ORDERING INFORMATION

Package	Order No.	Description	Supplied As	Status
SOP-14	74HC14D	Hex Schmitt Trigger Inverters	Tape & Reel	Active
DIP-14	74HC14N	Hex Schmitt Trigger Inverters	Tube	Active

# Hex Schmitt Trigger Inverters

74HC14


## PIN CONFIGURATION

SOP-14		DIP-14	
1A	1	14	VCC
1Y	2	13	6A
2A	3	12	6Y
2Y	4	11	5A
3A	5	10	5Y
3Y	6	9	4A
GND	7	8	4Y

## PIN DESCRIPTION

Pin No.		Pin Name	Pin Function
SOP-14	DIP-14		
1	1	1A	Input 1
2	2	1Y	Output 1
3	3	2A	Input 2
4	4	2Y	Output 2
5	5	3A	Input 3
6	6	3Y	Output 3
7	7	GND	Ground
8	8	4Y	Output 4
9	9	4A	Input 4
10	10	5Y	Output 5
11	11	5A	Input 5
12	12	6Y	Output 6
13	13	6A	Input 6
14	14	VCC	Power Supply

## BLOCK DIAGRAM

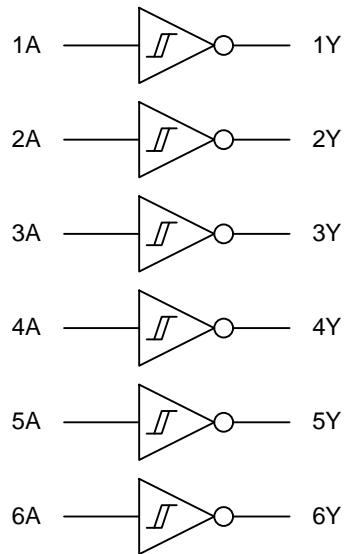

# Hex Schmitt Trigger Inverters

74HC14

## DC ELECTRICAL CHARACTERISTICS

Over operating free-air temperature range (unless otherwise noted); Voltages referenced to GND.

SYMBOL	PARAMETER	TEST CONDITION		V <sub>CC</sub>	MIN	TYP	MAX	UNIT
V <sub>TP</sub>	Positive-Going Input Threshold Voltage			2.0 V	0.7	1.2	1.5	V
				4.5 V	1.55	2.5	3.15	
				6.0 V	2.1	3.3	4.2	
V <sub>TN</sub>	Negative-Going Input Threshold Voltage			2.0 V	0.3	0.6	1	V
				4.5 V	0.9	1.6	2.45	
				6.0 V	1.2	2	3.2	
V <sub>H</sub>	Hysteresis ( $V_{TP} - V_{TN}$ )			2.0 V	0.2	0.6	1.2	V
				4.5 V	0.4	0.9	2.1	
				6.0 V	0.5	1.3	2.5	
V <sub>OH</sub>	Output High Voltage	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = -20µA	2.0 V	1.9	1.998	-	V
				4.5 V	4.4	4.499	-	
				6.0 V	5.9	5.999	-	
			I <sub>OH</sub> = -4mA	4.5 V	3.98	4.3	-	
			I <sub>OH</sub> = -5.2mA	6.0 V	5.48	5.8	-	
V <sub>OL</sub>	Output Low Voltage	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = 20µA	2.0 V	-	0.002	0.1	V
				4.5 V	-	0.001	0.1	
				6.0 V	-	0.001	0.1	
			I <sub>OH</sub> = 4mA	4.5 V	-	0.15	0.26	
			I <sub>OH</sub> = 5.2mA	6.0 V	-	0.17	0.26	
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = V <sub>CC</sub> or GND		6.0 V	-	±0.1	±100	nA
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0A		6.0 V	-	-	2.0	µA

## AC ELECTRICAL CHARACTERISTICS

Over operating free-air temperature range (unless otherwise noted); C<sub>L</sub> = 50 pF, Z<sub>O</sub> = 50Ω, Input t<sub>r</sub> = t<sub>f</sub> = 6 ns

SYMBOL	PARAMETER	V <sub>CC</sub>	MIN	TYP	MAX	UNIT
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay, Input A to Output Y (Figure 3)	2.0 V	-	55	125	ns
		4.5 V	-	12	25	
		6.0 V	-	11	21	
t <sub>TLH</sub> , t <sub>THL</sub>	Transition Time, Any Output (Figure 3)	2.0 V	-	38	75	ns
		4.5 V	-	8	15	
		6.0 V	-	6	13	

## FUNCTION TABLE

Input (A)	Output (Y)
H	L
L	H

## SWITCHING CHARACTERISTICS

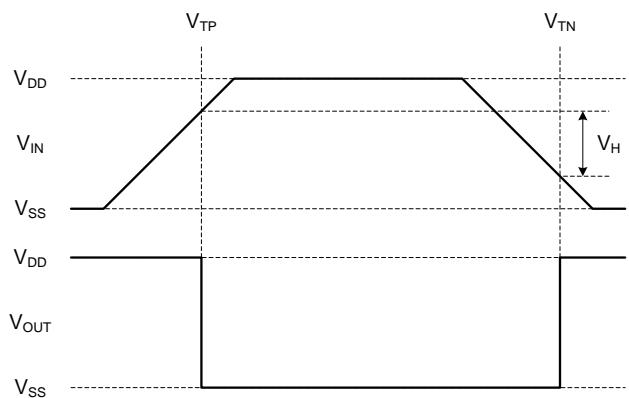


Fig. 1. Hysteresis Definition

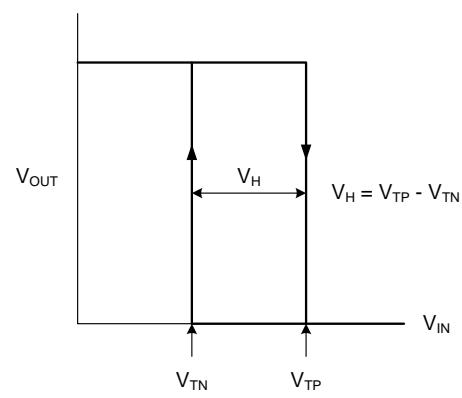


Fig. 2. Hysteresis Characteristic

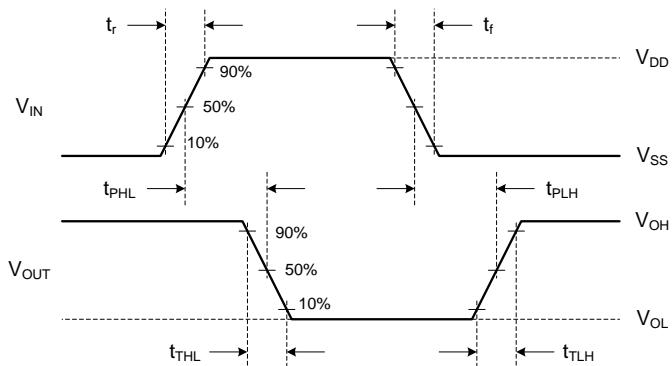


Fig. 3. Switching Time Waveforms

## **TYPICAL OPERATING CHARACTERISTICS**

T.B.D.

## **REVISION NOTICE**

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.